

Wall-mount Housing

DP20-WME

Wall mount housing for 1/8 DIN panel meters (96 x 48 mm)



WME enclosure shown with DP20 meter and IP65 lens cover fitted, both available separately. Shown smaller than actual size.


The WME housing provides a wall mounting option for 1/8 DIN panel meters and controllers with a maximum depth of 110 mm. Access for wiring is provided by cable glands mounted on the bottom of the housing. The WME housing provides IP65 protection and the SPC18 clear front lens cover is also available for use with instruments that do not have an IP65 front panel/lens rating (such as the DP20) to ensure complete IP65 sealing of the instrument.

It is recommended to route signal and power cables separately and as standard 2 cable glands are fitted. The enclosure can be ordered with up to 5 cable glands installed to allow for control, retransmission and communications cables as required. The mounting position of the cable glands is shown in the drawing on page 2.

1.2 Technical specifications

Material	ABS
O-ring	polyurethane o-ring on the cover
Temperature	-20 / +60 °C
Inflammability	UL94 HB
Protection	IP65* <i>(*to assure IP65 protection on the instrument, please use the SPC18 protector, not included, order separately)</i>
Colour	light grey RAL7035
Includes	housing, polyamide screws (for lid) and mounting screws
Cable gland closing	from 8 mm to 2.5 mm

1.4 Front view

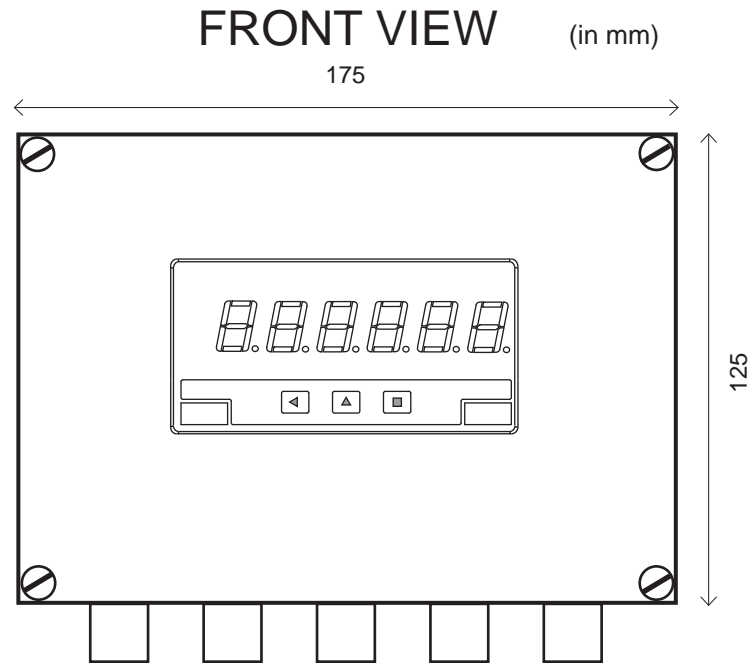

1.5 Bottom view

